



BRICK COLLECTION®

Rústico panel

A decorative panel that reproduces an old brick wall with all its texture and irregularity. Made in PR and HD grades, light and fitted with no building work, in eleven colour finishes to recreate anything from a warm, rustic wall to an industrial setting. In HD, also suitable for façades and exteriors.


01 Data sheet

TECHNICAL DATA

Format	PR 0.99 m ² (117 × 95) · HD 0.75 m ² (117 × 72) · corner pieces
Thickness	PR 1 cm · HD 2 cm
Material	PR (polyurethane + stone) and HD (stone-based polymer concrete)
Finish	Old brick wall · 11 colour finishes
Application	Wall · Interior (PR) and exterior (HD)

Brick LADRILLO RÚSTICO

Medidas en cm. / Measures in cm.

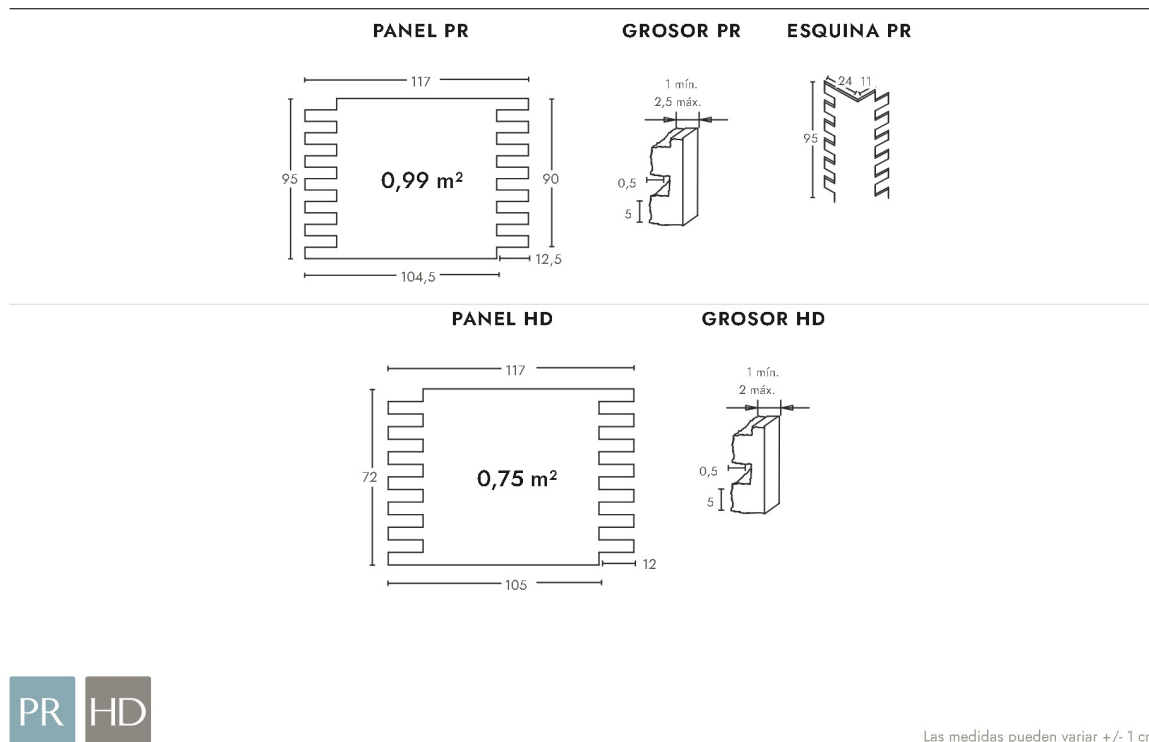

Dimensions in cm.

02 Colour range

FINISH COLOURS

FINISHES



Junta Oscura
Ref. 03



Envejecido
Ref. 70



Blanco
Ref. 71



**Envejecido
Caleado**
Ref. 72



Terroso
Ref. 73



Arcilloso
Ref. 74



**Arcilloso
Caleado**
Ref. 76



**Junta Oscura
Caleado**
Ref. 78



**Terroso
Caleado**
Ref. 79



Gris Carbón
Ref. 701



**Gris
Combinado**
Ref. 702

Eleven colour finishes, from Blanco and Envejecido to Gris Carbón and Gris Combinado, in PR (interior) and HD (interior and exterior) grades. Each finish has its own joint filler and paint.

03 Finishing materials by finish

FINISHING MATERIALS



Junta Oscura REF. 03

REQUIRED

MSA-50 · Oscuro joint filler	1 cartridge / 2 - 3 panels
PT-12 · Junta Oscura paint	1 tub / 25 panels
PTE-21 · Marrón ageing paint	1 spray / 15 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 - 5 panels
PTE-24 · Rojo ageing paint	1 spray / 15 panels
PTX-04 · Beige brick	1 spray / 15 panels



Envejecido REF. 70

REQUIRED

MSA-50 · Oscuro joint filler	1 cartridge / 2 - 3 panels
PT-12 · Junta Oscura paint	1 tub / 8 panels
PTE-21 · Marrón ageing paint	1 spray / 15 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 - 5 panels
PTX-11 · Rojo Viejo paint	1 spray / 15 panels



Blanco REF. 71

REQUIRED

MSA-70 · Blanco Italia joint filler	1 cartridge / 2 - 3 panels
PTX-10 · Blanco Nieve paint	1 spray / 8 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 - 5 panels
------------------------	----------------------------

Each finish has its own joint filler and paints: the products in the table are those for the colour chosen. Coverage figures are approximate and for guidance only. The MSA-3 bonding filler is only needed if the panel is bonded to the wall instead of screwed.

03 Finishing materials by finish (continued)

FINISHING MATERIALS



Envejecido Caleado REF. 72

REQUIRED

MSA-50 · Oscuro joint filler	1 cartridge / 2 - 3 panels
PT-12 · Junta Oscura paint	1 tub / 25 panels
PTE-33 · Caleado + Compó (Bote) ageing paint	1 spray / 8 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 - 5 panels
PTX-11 · Rojo Viejo paint	1 spray / 15 panels



Terroso REF. 73

REQUIRED

MSA-50 · Oscuro joint filler	1 cartridge / 2 - 3 panels
PT-12 · Junta Oscura paint	1 tub / 25 panels
PTE-21 · Marrón ageing paint	1 spray / 15 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 7 panels
PTX-32 · Terroso brick	1 spray / 15 panels
PTX-33 · Terroso Oscuro brick	1 spray / 15 panels



Arcilloso REF. 74

REQUIRED

MSA-50 · Oscuro joint filler	1 cartridge / 2 - 3 panels
PT-12 · Junta Oscura paint	1 tub / 25 panels
PTE-21 · Marrón ageing paint	1 spray / 15 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 - 5 panels
PTX-34 · Arcilloso brick	1 spray / 15 panels
PTX-35 · Arcilloso Oscuro brick	1 spray / 15 panels

Each finish has its own joint filler and paints: the products in the table are those for the colour chosen. Coverage figures are approximate and for guidance only. The MSA-3 bonding filler is only needed if the panel is bonded to the wall instead of screwed.

03 Finishing materials by finish (continued)

FINISHING MATERIALS



Arcilloso Caleado REF. 76

REQUIRED

MSA-50 · Oscuro joint filler	1 cartridge / 2 - 3 panels
PT-12 · Junta Oscura paint	1 tub / 25 panels
PTE-33 · Caleado + Compó (Bote) ageing paint	1 spray / 8 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 - 5 panels
PTX-34 · Arcilloso brick	1 spray / 15 panels
PTX-35 · Arcilloso Oscuro brick	1 spray / 15 panels



Junta Oscura Caleado REF. 78

REQUIRED

MSA-50 · Oscuro joint filler	1 cartridge / 2 - 3 panels
PT-12 · Junta Oscura paint	1 tub / 25 panels
PTE-33 · Caleado + Compó (Bote) ageing paint	1 spray / 8 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 - 5 panels
PTE-24 · Rojo ageing paint	1 spray / 15 panels
PTX-04 · Beige brick	1 spray / 15 panels



Terroso Caleado REF. 79

REQUIRED

MSA-50 · Oscuro joint filler	1 cartridge / 2 - 3 panels
PT-12 · Junta Oscura paint	1 tub / 25 panels
PTE-33 · Caleado + Compó (Bote) ageing paint	1 spray / 8 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 - 5 panels
PTX-32 · Terroso brick	1 spray / 15 panels
PTX-21 · Marrón ageing paint	1 spray / 15 panels

Each finish has its own joint filler and paints; the products in the table are those for the colour chosen. Coverage figures are approximate and for guidance only. The MSA-3 bonding filler is only needed if the panel is bonded to the wall instead of screwed.

03 Finishing materials by finish (continued)

FINISHING MATERIALS



Gris Carbón REF. 701

REQUIRED

MSA-30 · Gris joint filler	1 cartridge / 2 panels
PT-68 · Junta Ladrillo Antracita paint	1 spray / 8 panels
PT-91 · Gris Carbón paint	1 spray / 15 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 panels
------------------------	------------------------



Gris Combinado REF. 702

REQUIRED

MSA-10 · Beige joint filler	1 cartridge / 2 panels
PT-69 · Junta Ladrillo Gris Combinado paint	1 spray / 8 panels
PTX-92 · ladrillo Gris Combinado paint	1 spray / 15 panels

OPTIONAL

MSA-3 · Bonding filler	1 cartridge / 4 panels
------------------------	------------------------

Each finish has its own joint filler and paints; the products in the table are those for the colour chosen. Coverage figures are approximate and for guidance only. The MSA-3 bonding filler is only needed if the panel is bonded to the wall instead of screwed.

04 Specifications

FEATURES

 Interior

 Exterior

 Fire-resistant

 Thermal insulation

 Lightweight

 Bespoke

PR

INTERIOR

PR grade panel: a face layer of stone-based polymer concrete that reproduces the texture and the colour of old brick, over a high-density polyurethane core that provides thermal and acoustic insulation. Light and tongue-and-groove, it is fitted straight onto the existing surface, with no building work. For interiors.

6–9

kg/m²

WEIGHT

B-s1,d0

Euroclass

REACTION TO FIRE

Thermal

+ acoustic

INSULATION

Interior

APPLICATION

HD

INTERIOR AND EXTERIOR

HD grade panel: a single layer of marble dust (stone), a stone-based polymer concrete of aggregates (calcium carbonates, dolomites, silicates, aluminas and melamines) with resins and fire-retardant additives. Jigsaw-style tongue-and-groove, with water absorption of 0.3 %, high mechanical strength and complete stability against the weather, thermal shock and chemicals. Suitable for interiors and exteriors (façades and terraces).

15–20

kg/m²

WEIGHT

B-s1,d0

Euroclass

REACTION TO FIRE

0,3 %

water

ABSORPTION

Int/Ext

APPLICATION

05 Installation

INSTALLATION

Fitting the Rústico panel is straightforward: Brick panels are **jigsaw-style tongue-and-groove** and weigh very little, so they go **straight onto the existing surface, with no building work**. Prepare the wall, apply adhesive to the back, slot each panel into the previous one and reinforce with screws. Finish and fill the joints with the filler and paint for the finish.



1

Gather your materials

Drill, adhesive, spirit level, rule, plugs and screws.



2

Measure and level

A clean, dry and level wall.



3

Cut to size

With a saw or an angle grinder with a fine disc.



4

Apply adhesive


Beads of adhesive from top to bottom on the back of the panel.



5

Position the panel

Press the panel against the wall.



6

Fit the panels together

Join panel to panel, with no gaps.



7

Reinforce with screws

With the panels properly fitted, reinforce with 4-8 screws per panel.



8

Finish and fill

Fit the trim profiles, then fill and paint the joints.

Advantages

ADVANTAGES

- The lightest panel on the market.
- Easier, simpler installation.
- Panels that go up quickly.
- Significant cost savings.
- A perfect finish.
- No maintenance needed.
- Excellent acoustic insulation.
- Good thermal insulation and damp resistance.
- Excellent fire-retardant properties.
- Excellent water repellency.
- Unaffected by heat, cold or freezing.
- Waterproof material.
- Minimal abrasion.
- High resistance to most chemicals.
- Elegant combinations of materials and designs.
- Easy to transport and handle.

Sustainability

SUSTAINABILITY



FOR A BETTER QUALITY OF LIFE AND THE CONSERVATION OF THE ENVIRONMENT.

En Paneles Decorativos PanelPiedra® sabemos que siempre debemos estar en continua evolución, mejorando la calidad de vida y conservando la naturaleza y el medio ambiente.

We focus on increasing the positive impact of our panels, manufacturing with **75 % recyclable materials**, marble dust and quarry waste. We are committed to making our company steadily more sustainable.

Protecting nature and improving people's quality of life are what drive us to keep researching and improving.



1. Our resins OUR RESINS

IN OUR RESINS WE USE RECYCLED MATERIALS FROM PET PLASTIC BOTTLES.

En Paneles Decorativos PanelPiedra® utilizamos resinas de poliéster y poliuretano con una cantidad muy elevada de botellas de plástico recicladas.

Every square metre of our resin contains at least **1/3 recycled plastic bottles**.

2. Sustainable development

SUSTAINABLE DEVELOPMENT


Our plant has water treatment systems and manual processes to avoid using more water than necessary.

Our raw material is 75 % recyclable: marble dust and quarry waste. We are concerned about pollution and about waste such as plastic, so we use recyclable cardboard for our packaging to help protect the land and the oceans, because marine biodiversity is vital to the health of people and of our planet.

We want to conserve nature, adapting every manufacturing process to minimise the impact of what we do on the environment.

We try to generate as little waste as possible by making the most of our raw materials. Panel thicknesses are carefully worked out to avoid unnecessary bulk, cutting waste without affecting design or quality.

Our products are built to last and can be repainted, which means the product itself can be recycled; they can also be taken down and refitted elsewhere, making them a **reusable product**.

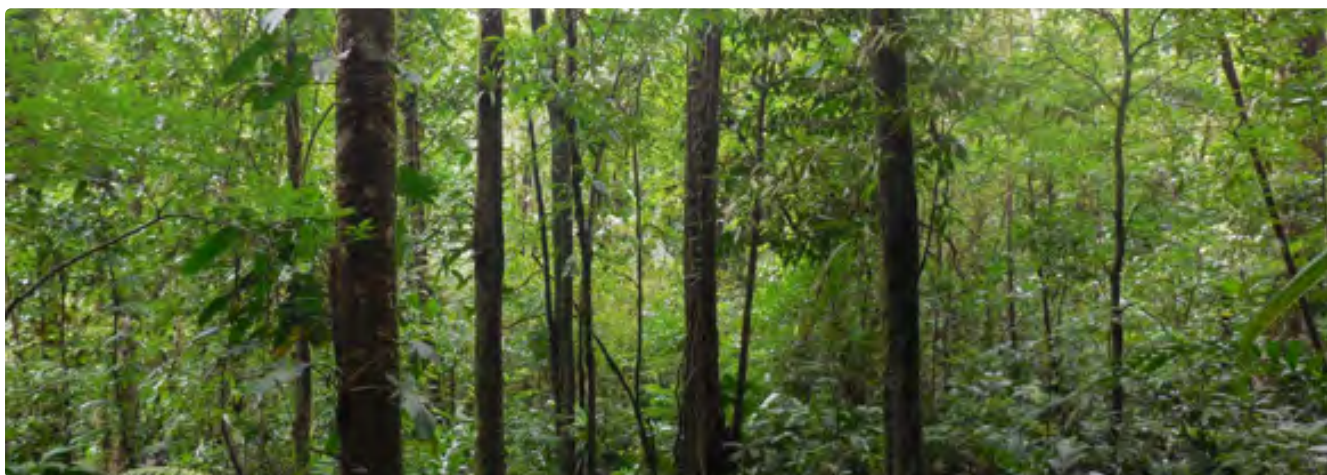

3. Raw material

RAW MATERIAL

En Paneles Decorativos PanelPiedra® estamos comprometidos con la continua mejora sostenible de nuestros productos, innovando en la seguridad de cada uno de los procesos.

Polyurethane, our raw material, has a set of properties that make our products work with the environment rather than against it.



4. Reducing energy consumption REDUCTION OF ENERGY CONSUMPTION

El poliuretano es un eficaz aislante térmico, proporcionando además aislamiento acústico. Los paneles decorativos de PanelPiedra® cuentan con el certificado de **Thermal insulation** under UNE standards. As effective insulators, they improve the energy efficiency of buildings and reduce the need for heating and cooling, and so cut carbon emissions.

The **Environmental Product Declarations (EPDs)** give quantified information on a product's environmental impact over its service life. PU Europe has carried out an environmental and economic life-cycle analysis of polyurethane as insulation in nearly zero-energy buildings, concluding that polyurethane is a highly efficient material solution given its low life-cycle cost.



5. Fire-retardant coating



FLAME RETARDANT COATING

Por su naturaleza, el poliuretano no genera gases ni humos asfixiantes y no es tóxico en contacto con el fuego, aumentando así la protección de personas y bienes. Al mismo tiempo, los Paneles Decorativos PanelPiedra® están fabricados con un **certified fire-retardant coating under UNE standards**, which establishes that the panels do not burn and withstand temperatures of up to 80° before they begin to deform. Thanks to years of intensive research, all our products meet international fire safety standards.

6. Reducing our carbon footprint CARBON FOOTPRINT REDUCTION

Our commitment to the environment and to reducing our carbon footprint is total. We have developed an advanced climate action plan measuring the carbon footprint of recent years, which will allow us to reduce, and even neutralise, the impact of our business.

Unavoidable greenhouse gas emissions (the carbon footprint that cannot feasibly be reduced) will be offset by buying carbon credits. In this way PanelPiedra® is committed to becoming a **100 % Carbon Neutral** in the coming years.

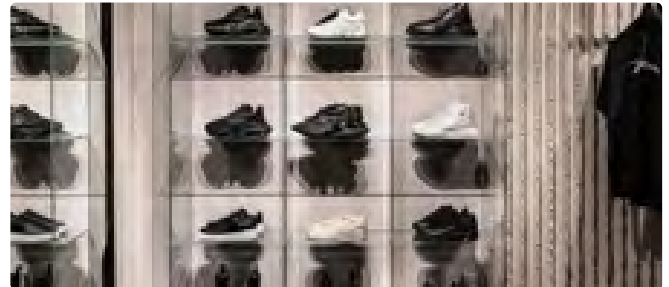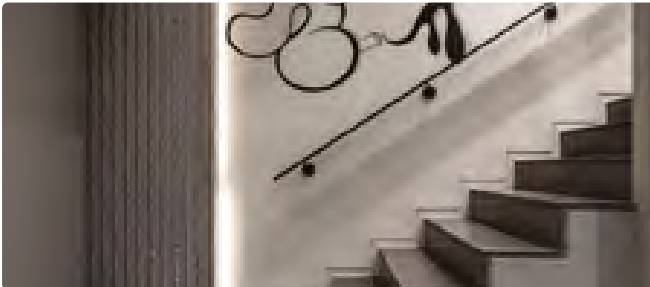



PANELES DECORATIVOS PANELPIEDRA S.L.

Pol. Ind. Municipal, Vial Transversal 2 · 31500 Tudela (Navarra) · España

+34 941 181 091 · info@panelpiedra.com

www.panelpiedra.com

Made in our own factory in Tudela since 1974.